


FEMALE HEADER

- Industry compatible
- Competitively priced
- Dual Row
- No of contacts 10-100
- Gold plating contacts
- 1.27mm pitch

FEMALE HEADER SMT/THROUGH HOLE 1.27 PITCH

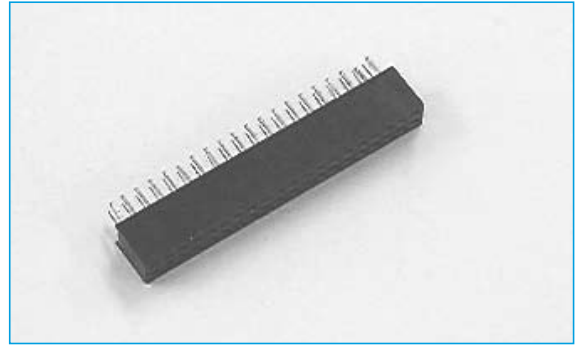

SECTION 8

SPECIFICATION

Material & Finish



Insulator: LCP, glass reinforced, rated UL 94V-0
Contact: Phosphor Bronze

Electrical Characteristics





Rating Current: 0.5 Amp DC
Contact Resistance: 30 mΩ
Insulation Resistance: 1000 MΩ min.
Dielectric Voltage: 250v AC for 1 minute
Operating Temperature: -40°C to +105°C

* Mating suggestion: C11, C12 series.

OUTLINE DRAWING

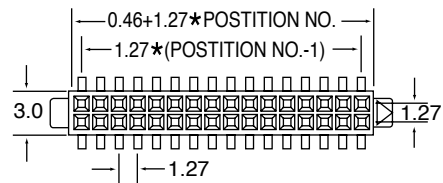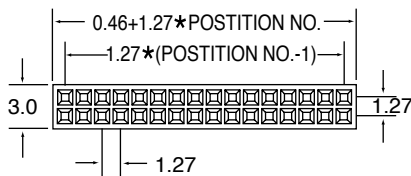

Type	X	Y
A	3.4	3.6
B	4.3	4.5

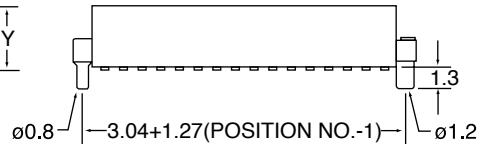

ORDERING INFORMATION

DBC	B28	D	10	B	G	A	B	B	1
Dubilier Connectors	Series	No. of Rows	No. of Contacts	Contact Material	Contact Plating	Mounting Type	Height	Peg	Colour
		D = Dual Row	05-50	B = Phosphor Bronze	G = Gold	A = Through hole B = SMT	B = 4.3mm	B = Without	1 = Black