


PIN HEADERS

- Industry compatible
- Competitively priced
- Gold plated contacts
- No. of contacts 02 to 50
- 1.27mm pitch

SINGLE ROW STRAIGHT 1.27MM

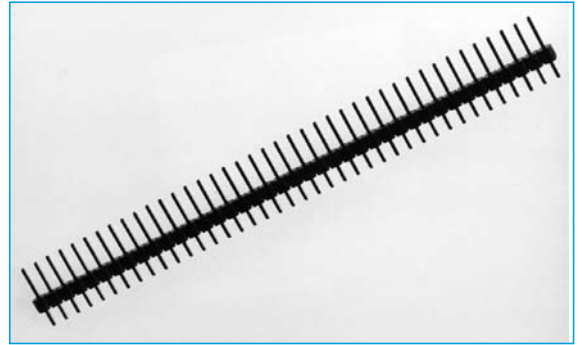


SECTION 8

SPECIFICATION

Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	1000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

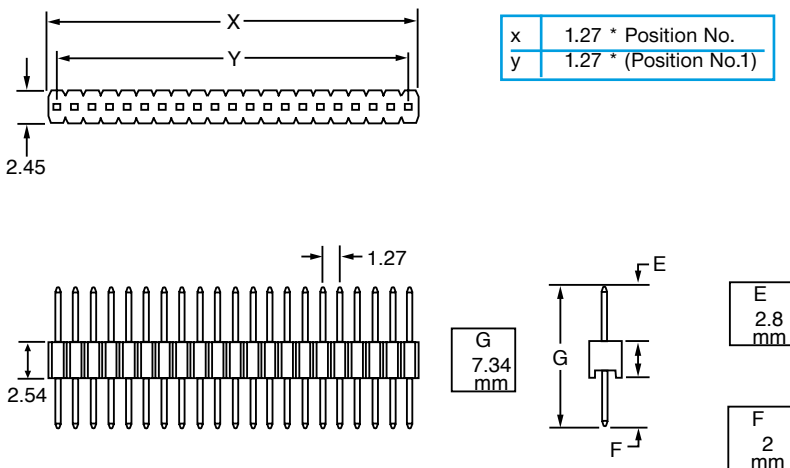

ORDERING INFORMATION

DBC	PH	C09	10	A	G	1
Dubilier Connectors	Pin Header Connector	Series	No. of Contacts 02 = 2way thro to 50 = 50way	Contact Material A = Brass	Contact Plating G = Gold Plating	Colour 1 = Black

PIN HEADERS

SINGLE ROW RIGHT ANGLE 1.27MM

- Industry compatible
- Competitively priced
- Gold plated contacts
- No. of contacts 02 to 50
- 1.27mm pitch




SECTION 8

SPECIFICATION



Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	1000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

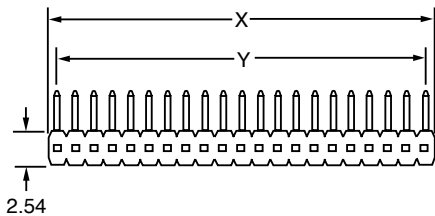

x	1.27 * Position No.
y	1.27 * (Position No.1)

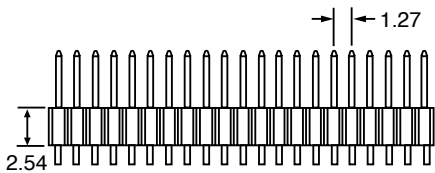

ORDERING INFORMATION


DBC	PH	C10	10	A	G	1
Dubilier Connectors	Pin HHeader Connector	Series	No. of Contacts 02 = 2way thro to 50 = 50way	Contact Material A = Brass	Contact Plating G = Gold Plating	Colour 1 = Black



PIN HEADERS

- Industry compatible
- Competitively priced
- Various plating contacts available
- 1.27mm pitch
- Various pin lengths available

DUAL ROW STRAIGHT 1.27MM

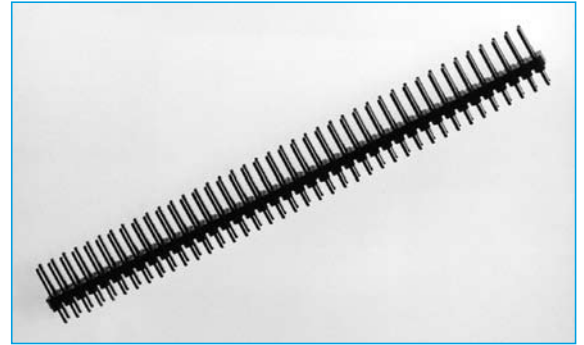


SECTION 8

SPECIFICATION


Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	1000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

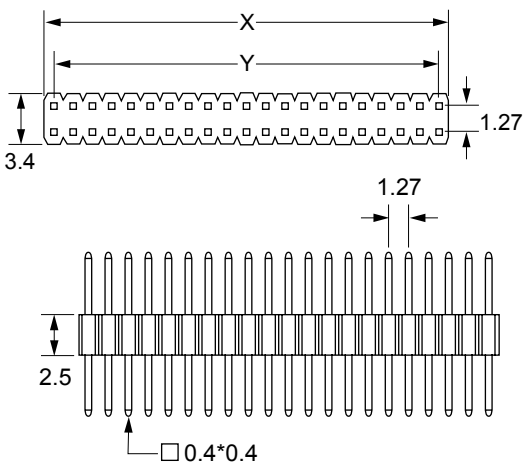

x	1.27 * Position No.
y	1.27 * (Position No.1)

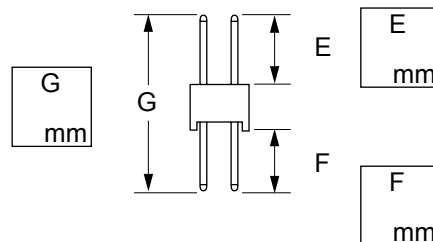

ORDERING INFORMATION

DBC Dubilier Connectors	PH Pin Header Connector	C11 Series	04 No. of Contacts /Per Row 02 = 2x2way thro to 40 = 40x2way	A Contact Material A = Brass	G Contact plating G = Gold Plating S = Selective T = Tin Plating * = Other plating available	1 Colour 1 = Black	-XXX Unique Special Code * See Below
--------------------------------------	--------------------------------------	----------------------	--	---	---	-------------------------------------	--

* Dubilier will allocate a special code to distinguish special pin lengths



PIN HEADERS

DUAL ROW RIGHT ANGLE 1.27MM

- Industry compatible
- Competitively priced
- Various plating contacts available
- 1.27mm pitch
- Various pin lengths available




SECTION 8

SPECIFICATION


Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	1000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

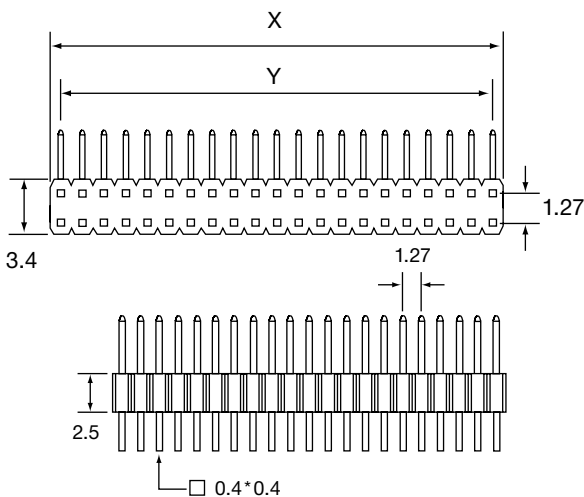

x	1.27 * Position No.
y	1.27 * (Position No.-1)

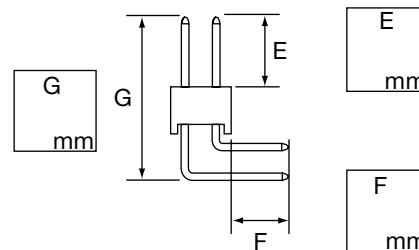

ORDERING INFORMATION

DBC Dubilier Connectors	PH Pin Header Connector	C12 Series	04 No. of Contacts /Per Row 02 = 2x2way thro to 40 = 40x2way	A Contact Material A = Brass	G Contact plating G = Gold Plating S = Selective T = Tin Plating * = Other plating available	1 Colour 1 = Black	-XXX Unique Special Code * See Below
-----------------------------------	-----------------------------------	----------------------	--	---	--	-------------------------------------	---


* Dubilier will allocate a special code to distinguish special pin lengths



PIN HEADERS

SINGLE ROW SMT STRAIGHT 1.27mm

- Industry compatible
- Competitively priced
- Various plated contacts available
- 1.27mm pitch
- Various pin lengths available

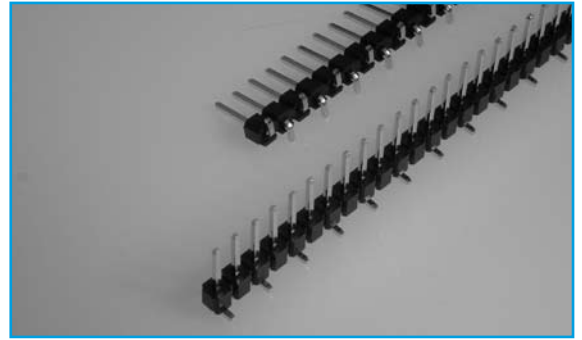


SECTION 8

SPECIFICATION




Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	3000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

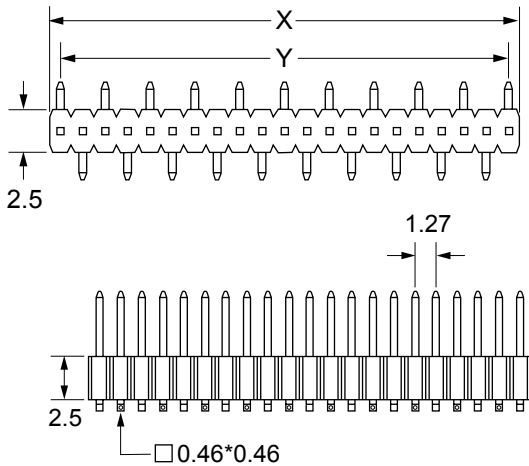

x	1.27 * Position No.
y	1.27 * (Position No.-1)



ORDERING INFORMATION

DBC	PH	C45	04	A	G	1	-XXX
Dubilier Connectors	Pin Header Connector	Series	N° of Ways 02=02way Thro to 40=40way	Contact Material A=Brass	Contact Plating G= Gold Flash S=Selective T=Tin Plated other plating Available	Colour 1=Black	Unique Special Code *See Below


*Dubilier will allocate a special code to distinguish pin lengths if required



PIN HEADERS

DUAL ROW SMT STRAIGHT 1.27mm

- Industry Compatible
- Competitively priced
- Various plated contacts available
- 1.27mm pitch
- Various pin lengths available

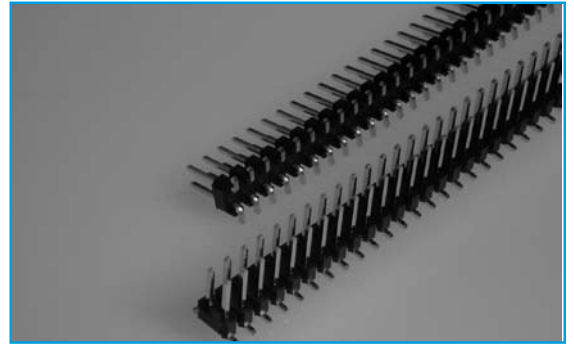


SECTION 8

SPECIFICATION


Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	1000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

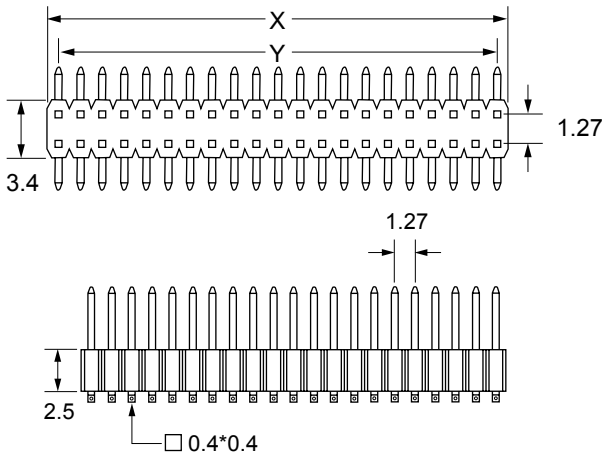

x	1.27 * Position No.
y	1.27 * (Position No.-1)

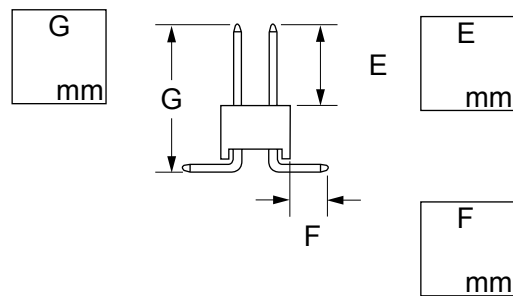

ORDERING INFORMATION

DBC	PH	C47	32	A	G	1	-XXX
Dubilier Connectors	Pin Header Connector	Series	No. of Ways 02= 2 Ways Thro to 40= 40 Ways	Contact Material A= Brass	Contact Plating G= Gold Flash T= Tin Plated S= Selective	Colour 1= Black	Unique Special Code *See below


*Dubilier will allocate a special code to distinguish the pins lengths E,F and G



PIN HEADERS

DUAL BODY SINGLE ROW 1.27mm

- Industry compatible
- Competitively priced
- Various plated contacts available
- 1.27mm pitch
- Various pin lengths available

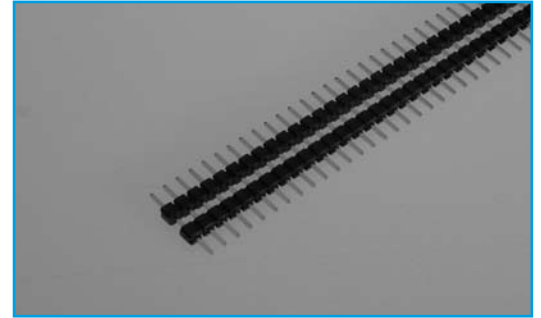


SECTION 8

SPECIFICATION

Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	3000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

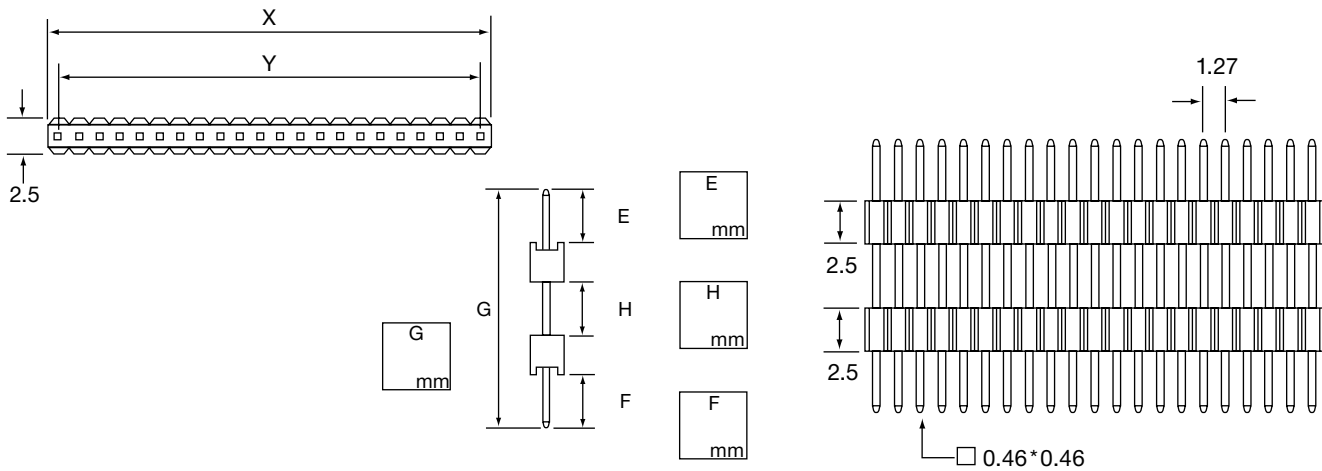

ORDERING INFORMATION

DBC	PH	C46	04	A	G	1	-XXX
Dubilier Connectors	Pin Header Connector	Series	N° of Ways 02=02way Thro to 40=40way	Contact Material A=Brass	Contact Plating G= Gold Flash S=Selective T=Tin Plated other plating Available	Colour 1=Black	Unique Special Code *See Below

*Dubilier will allocate a special code to distinguish pin lengths if required