


## NETWORKING SOCKETS

- LEDs within socket
- Shielded and Unshielded RJ45 available
- Bi Colours available
- Wide range of colours


## LED LIGHT JACKS

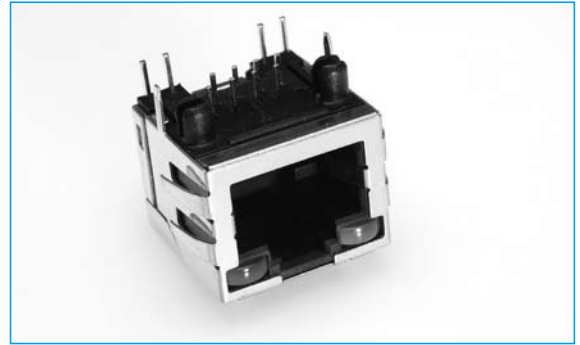

## SPECIFICATION

<b>Current Rating</b>	3A
<b>Contact Resistance</b>	30mΩ max at DC 100mA
<b>Dielectric withstanding Voltage</b>	AC 500V for 1 minute
<b>Insulation Resistance</b>	1000mΩ min at DC 500V
<b>Plating</b>	Gold plating over Nickel Tin plate over nickel in solder area
<b>Housing</b>	Thermoplastic (UL94V-0)
<b>Contact</b>	0.35mm Phosphor Bronze
<b>Operating Temperature</b>	-55 °C to +105 °C

## OUTLINE DRAWING

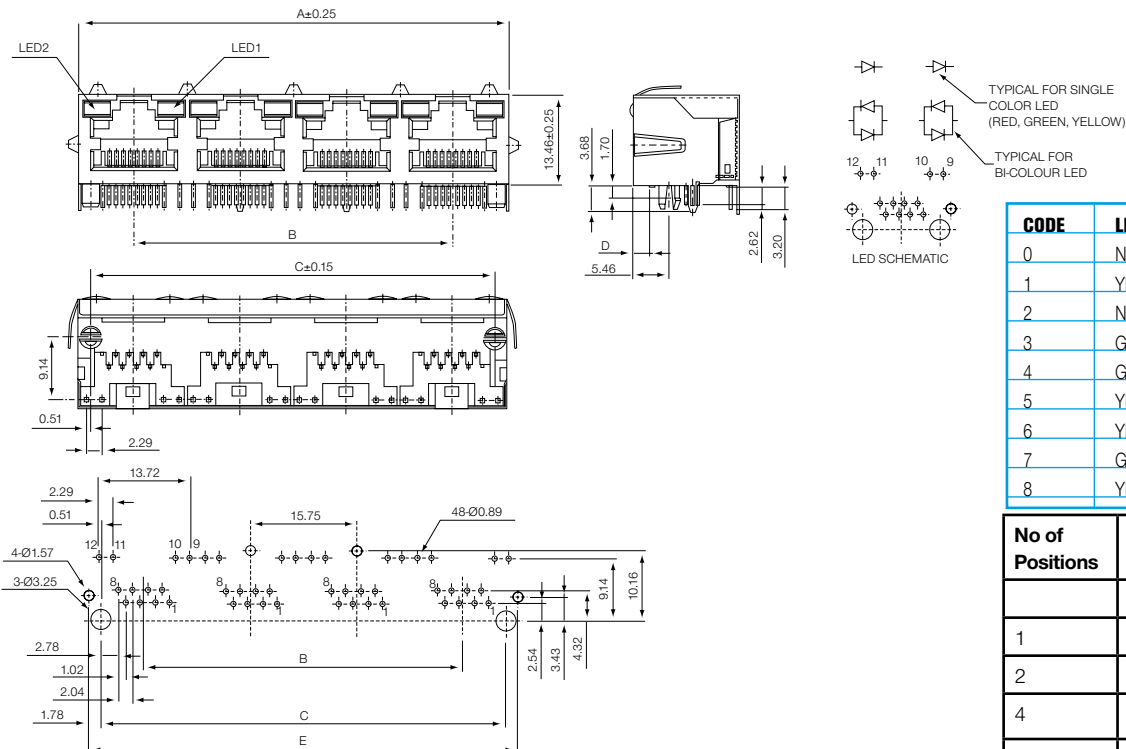

CODE	LED2 (Left)	LED1 (Right)
0	NO LED	NO LED
1	YELLOW	GREEN
2	NO LED	GREEN
3	GREEN	YELLOW
4	GREEN	GREEN
5	YELLOW	YELLOW
6	YELLOW/GREEN	YELLOW/GREEN
7	GREEN/RED	GREEN/RED
8	YELLOW/GREEN	YELLOW

No of Positions	Dimensions			
	A	B	C	D
1	15.91		12.70	2.25
2	31.66	15.75	28.45	2.37
4	63.16	47.25	59.94	2.37
6	94.66	78.75	91.45	2.37
8	126.16	110.25	122.94	2.37

## ORDERING INFORMATION

DBC	RJ	S	2	4	1	2
Dubilier Connectors	Series	Contact Type S = Socket	No. of Ports 1 = 1 port 2 = 2 ports 4 = 4 ports 8 = 8 ports	LED Colour See table above	Contact Plating 1 = 6μ" 2 = 50μ"	Shielding 1 = Unshielded 2 = Shielded