


TERMINAL BLOCKS

- 3.5mm Pitch
- Low profile
- UL94V-0 Flame retardant material
- 0.75mm² wire acceptance
- UL/CSA approved
- Interlocking
- Professional rising clamp

3.5mm PITCH VERTICAL MOUNT - LOW PROFILE

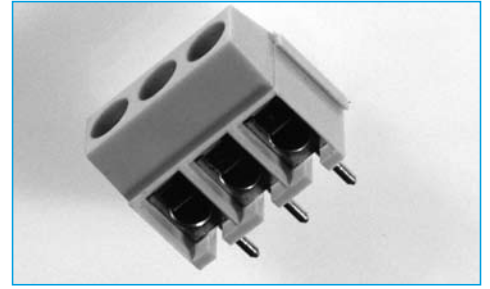


SPECIFICATION

Rating: 9A/130 Vac
Dielectric Strength: 1.5KV
Insulation Resistance: >5MΩ
Working temperature: -20°C to 125°C
Short Period: 160°
Moulding: UL94V-0 flame retardant nylon 66

Pin/terminal: 5 micron tinned nickel plated brass
Rising clamp: 5 Nickel flashed brass
Screw/torque: M2 steel/0.3Nm 6 micron zinc colour passivated and tropicalised
Recommended PCB hole size: ø1.1mm

OUTLINE DRAWING

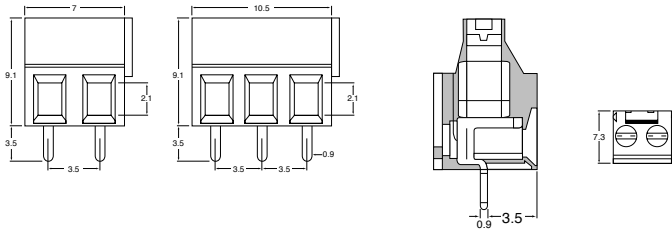

ORDERING INFORMATION

| DBC | TB | 1 | /2 |
|---------------------|-----------------------|-------|--------------------------|
| Dubilier Connectors | Series Terminal Block | Style | N° of Ways |
| | | | 2 = 2 ways 3 = 3 ways |

TERMINAL BLOCKS

- 3.5mm Pitch
- Ultra Low Profile
- Flame Retardant Material
- 1mm² wire acceptance
- UL/ CSA approved
- Interlocking
- Screw terminal



3.5mm PITCH VERTICAL MOUNT




SPECIFICATION

Rating: 10A/125V
Dielectric Strength: 1.5KV
Insulation Resistance: ≥5MΩ/1000V
Working temperature: -33°C to 125°C
Short Period: 160°
Moulding: UL94V-0 flame retardant PA66

Pin/terminal: 5μ tinned, nickel plated copper flash brass
Wire protector: Nickel plated brass
Screw/torque: M2 steel, 5μ zinc & colour passivated and tropicalised/0.4Nm max
Recommended PCB hole size: ø1.1mm

OUTLINE DRAWING

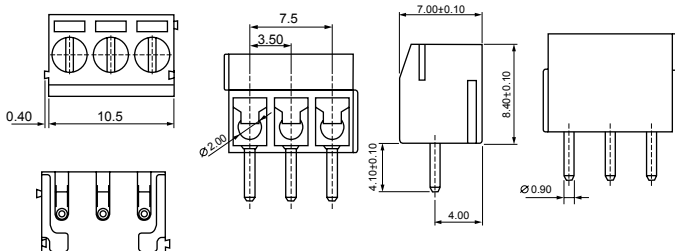

ORDERING INFORMATION

| DBC | TB | 56 | /2 |
|---------------------|-----------------------|-------|--------------------------|
| Dubilier Connectors | Series Terminal Block | Style | N° of Ways |
| | | | 2 = 2 ways 3 = 3 ways |

* Other Number of ways are available up to 12
Please consult office for further details



TERMINAL BLOCKS

- 3.5mm pitch
- Ultra low profile
- Flame retardant material
- 1mm² wire acceptance
- UL/CSA approved
- Interlocking
- Screw terminal

3.5mm PITCH 90° MOUNT




SPECIFICATION

Rating: 10A/125V
Dielectric Strength: 1.5KV
Insulation Resistance: 5MΩ/1000V
Working temperature: -33°C to 125°C
Short Period: 160°
Moulding: UL94V-0 flame retardant PA66

Pin/terminal: 5μ tinned, nickel plated copper flash brass
Screw/torque: M2 steel, 5μ zinc & colour passivated 0.4Nm max
Recommended PCB
Hole Size: ø1.1mm

OUTLINE DRAWING

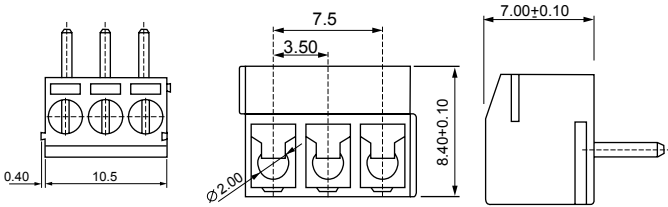

ORDERING INFORMATION

| | | | |
|---------------------|-----------------------|-----------|--|
| DBC | TB | 81 | /2 |
| Dubilier Connectors | Series Terminal Block | Style | N° of Ways 2 = 2 ways 3 = 3 ways |

* Other Number of ways are available up to 12
 Please consult office for further details



TERMINAL BLOCKS

- 3.5mm pitch
- Ultra low profile
- Flame retardant material
- 0.75mm² wire acceptance
- UL/CSA approved
- Interlocking
- Professional rising clamp

3.5mm PITCH 90° MOUNT




SPECIFICATION

Rating: 9A/130V
Dielectric Strength: 1.5KV/60sec
Insulation Resistance: ≥5MΩ
Working temperature: -20°C to 125°C
Short Period: 160°
Moulding: UL94V-0 flame retardant PA66

Pin/terminal: 5μ tinned, nickel plated brass
Rising clamp: Nickel plated brass
Screw/torque: M2 steel, 6μ zinc colour passivated and tropicalised/0.3Nm
Recommended PCB
Hole Size: ø1.1mm

OUTLINE DRAWING



ORDERING INFORMATION


| | | | |
|---------------------|-----------------------|-----------|--|
| DBC | TB | 82 | /2 |
| Dubilier Connectors | Series Terminal Block | Style | N° of Ways 2 = 2 ways 3 = 3 ways |



TERMINAL BLOCKS

- 3.5mm Pitch
- Flame Retardant Material
- 1mm² wire acceptance
- UL/ CE approved
- Closed end headers
- Professional rising clamp




3.5mm PITCH PLUG IN

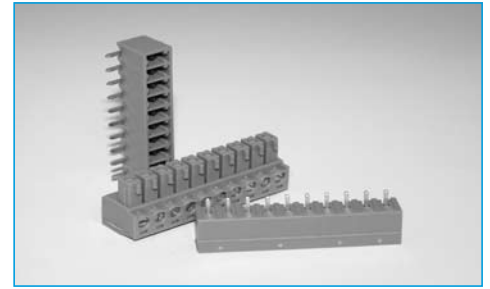




SPECIFICATION

| | | | |
|-------------------------------|------------------------------|-----------------------------------|--|
| Rating: | 9A/130V | Pin/terminal: | 5μ tinned, phosphor bronze |
| Dielectric Strength: | ≥1.25KV/60sec | Rising clamp: | 5μ Nickel copper flash brass |
| Insulation Resistance: | ≥5MΩ | Screw/torque: | M2 steel, 6μ zinc colour passivated and tropicalised/0.4Nm |
| Working temperature: | -20°C to 125°C | Recommended PCB hole size: | ø1.0mm |
| Short Period: | 160° | | |
| Moulding: | UL94V-0 flame retardant PA66 | | |




OUTLINE DRAWING



DBCTB65



DBCTB74



DBCTB66

ORDERING INFORMATION

| DBC | TB | 65 | /2 |
|---------------------|----------------|---|--------------------------|
| Dubilier Connectors | Series | Style | N° of Ways |
| | Terminal Block | 65=Style 65 74=Style 74 66=Style 66 | 2 = 2 ways 3 = 3 ways |

* Other Number of ways are available up to 12
Please consult office for further details