


# DEAJ Series AXIAL Type 105°C

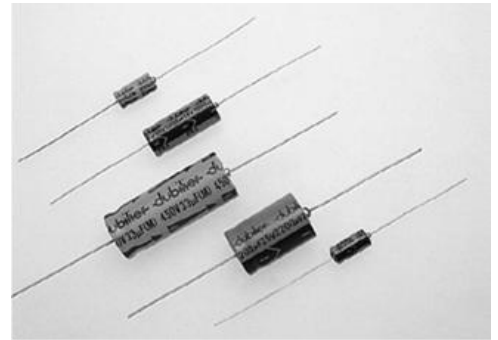

## FEATURES

- .105°C, 1,000 hours assured
- . Voltage range of 6.3 ~ 450V
- .Wide operating temperature range, from -40°C~ +105°C

## SPECIFICATION

Item	Characteristic																																																																																			
Operation Temp 使用溫度範圍	-40°C~ +105°C																																																																																			
Capacitance Tolerance 容量範圍	±10%(K), ±20%(M) (at 20°C,120Hz)																																																																																			
Rated Voltage 額定電壓	6.3 ~ 100VDC	160 ~ 450VDC																																																																																		
(20°C) Leakage Current 洩漏電流	I≤0.02CV or 3 (u A) Whichever is greater 選其最大值 (after 2 minutes applying the rated DC working Voltage at 20 °C)(在 20°C施加直流額定電壓 2 分鐘以後)	I≤0.03CV+15 (u A) for CV≤1000, I≤0.02CV+25 (u A) for CV>1000 (after 5 minutes applying the rated DC working Voltage at 20 °C)(在 20°C施加直流額定電壓 5 分鐘以後)																																																																																		
	Where: I=Leakage Current (u A) , C=rated Capacitance (μ F) , V= working Voltage (V)																																																																																			
(at 20°C,120Hz) Dissipation Factor (tan δ) 損失角	<table border="1"> <tr> <td>W.V</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> </tr> <tr> <td>tan δ</td> <td>0.23</td> <td>0.20</td> <td>0.17</td> <td>0.15</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> <td>0.15</td> <td>0.15</td> <td>0.20</td> <td>0.20</td> <td>0.24</td> <td>0.24</td> </tr> </table> <p>Add 0.02 per 1000μ F for more than 1000μ F (當靜電容量超過 1000μ F 時，容量每增加 1000μ F，損失角正切值就增加 0.02)</p>		W.V	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	tan δ	0.23	0.20	0.17	0.15	0.12	0.10	0.09	0.08	0.15	0.15	0.20	0.20	0.24	0.24																																																				
W.V	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450																																																																						
tan δ	0.23	0.20	0.17	0.15	0.12	0.10	0.09	0.08	0.15	0.15	0.20	0.20	0.24	0.24																																																																						
(20°C) Surge Voltage 突破電壓	<table border="1"> <tr> <td>W.V</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> </tr> <tr> <td>S.V</td> <td>8</td> <td>13</td> <td>20</td> <td>32</td> <td>44</td> <td>63</td> <td>79</td> <td>125</td> <td>200</td> <td>250</td> <td>300</td> <td>400</td> <td>450</td> <td>500</td> </tr> </table>		W.V	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	S.V	8	13	20	32	44	63	79	125	200	250	300	400	450	500																																																				
W.V	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450																																																																						
S.V	8	13	20	32	44	63	79	125	200	250	300	400	450	500																																																																						
Low Temperature Stability 低溫溫度特性	Impedance ratio at 120 HZ 阻抗測試頻率為 120Hz																																																																																			
	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)</td> <td colspan="2">φD&lt;16</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>6</td> <td>8</td> <td>12</td> <td>14</td> <td>16</td> </tr> <tr> <td>+20°C</td> <td colspan="2">φD≥16</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>4</td> <td>8</td> <td>10</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>Z(-40°C)</td> <td colspan="2">φD&lt;16</td> <td>10</td> <td>8</td> <td>6</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>4</td> <td>8</td> <td>10</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>+20°C</td> <td colspan="2">φD≥16</td> <td>18</td> <td>16</td> <td>12</td> <td>10</td> <td>8</td> <td>8</td> <td>6</td> <td>6</td> <td>4</td> <td>8</td> <td>10</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>		Rated Voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	Z(-25°C)	φD<16		6	4	3	3	2	2	2	2	3	6	8	12	14	16	+20°C	φD≥16		8	6	4	4	3	3	3	3	4	8	10	-	-	-	Z(-40°C)	φD<16		10	8	6	6	4	3	3	3	4	8	10	-	-	-	+20°C	φD≥16		18	16	12	10	8	8	6	6	4	8	10	-	-
Rated Voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450																																																																						
Z(-25°C)	φD<16		6	4	3	3	2	2	2	2	3	6	8	12	14	16																																																																				
+20°C	φD≥16		8	6	4	4	3	3	3	3	4	8	10	-	-	-																																																																				
Z(-40°C)	φD<16		10	8	6	6	4	3	3	3	4	8	10	-	-	-																																																																				
+20°C	φD≥16		18	16	12	10	8	8	6	6	4	8	10	-	-	-																																																																				
Load Life Test 高溫負荷壽命	After 1,000 hours application of rated voltage at 105°C, capacitors meet the characteristics requirements listed as below. 在額定電壓 105°C 條件下，經過 1,000 小時後，電容特性要求如下表：																																																																																			
	<table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>		Capacitance Change	Within ±20% of initial value	Dissipation Factor	Less than 200% of specified value	Leakage Current	Within specified value																																																																												
Capacitance Change	Within ±20% of initial value																																																																																			
Dissipation Factor	Less than 200% of specified value																																																																																			
Leakage Current	Within specified value																																																																																			
Shelf Life Test 無負荷壽命	After leaving capacitors under no load at 105°C for 1,000 hours and applying Voltage they meet the specified value for load life characteristics listed above. 將電容器置於溫度為 105°C、無電壓負荷狀況下，經過 1,000 小時後，再加電壓於電容器，其所測值標準應與有負荷時測試值相同。																																																																																			
Frequency Coefficient of Allowable Ripple Current 允許紋波電流的頻率係數	<table border="1"> <tr> <th rowspan="2">Cap.( μ F)</th> <th colspan="5">Freq.(Hz)</th> </tr> <tr> <th>60</th> <th>120</th> <th>500</th> <th>1K</th> <th>10K up</th> </tr> <tr> <td>Under 100</td> <td>0.70</td> <td>1.00</td> <td>1.30</td> <td>1.40</td> <td>1.50</td> </tr> <tr> <td>100 to 1000</td> <td>0.75</td> <td>1.00</td> <td>1.20</td> <td>1.30</td> <td>1.35</td> </tr> <tr> <td>1000 up above</td> <td>0.80</td> <td>1.00</td> <td>1.10</td> <td>1.12</td> <td>1.15</td> </tr> </table>		Cap.( μ F)	Freq.(Hz)					60	120	500	1K	10K up	Under 100	0.70	1.00	1.30	1.40	1.50	100 to 1000	0.75	1.00	1.20	1.30	1.35	1000 up above	0.80	1.00	1.10	1.12	1.15																																																					
Cap.( μ F)	Freq.(Hz)																																																																																			
	60	120	500	1K	10K up																																																																															
Under 100	0.70	1.00	1.30	1.40	1.50																																																																															
100 to 1000	0.75	1.00	1.20	1.30	1.35																																																																															
1000 up above	0.80	1.00	1.10	1.12	1.15																																																																															
Allowable Ripple Current Vs; Ambient Temperature 環境溫度對比允許紋波電流的比值	<table border="1"> <tr> <td>Temperature(°C)</td> <td>Under 50</td> <td>70</td> <td>85</td> <td>105</td> </tr> <tr> <td>Multiplier</td> <td>1.95</td> <td>1.78</td> <td>1.40</td> <td>1.00</td> </tr> </table>		Temperature(°C)	Under 50	70	85	105	Multiplier	1.95	1.78	1.40	1.00																																																																								
	Temperature(°C)	Under 50	70	85	105																																																																															
Multiplier	1.95	1.78	1.40	1.00																																																																																



## DEAJ and DEA Part Number Format

<b>DEA</b>	<b>100</b>	<b>16</b>	<b>/TR</b>
Range DEA 85°C DEAJ 105°C	Capacitance μF	Voltage V	Options Tape/Reel Blank = Loose