

BATTERIES

LITHIUM THIONYL CHLORIDE


SECTION 7

- Suitable as a replacement source of power in remote sensing/ monitoring equipment
- Very high energy density
- High terminal voltage
- 10 year shelf life due to low self discharge rates
- Hermetically sealed in stainless steel cans.



ORDERING INFORMATION

| Ordering Code | Type | Terminal Type | Nominal Voltage (V) | Nominal Capacity (mAh) | Standard Discharge Current (mA) | Max Continuous Discharge Current (mA) | Max Pulse Discharge Current (mA) | Temp Range (°C) | Dimensions (mm) | Weight (g) |
|---------------|-------|----------------------|---------------------|------------------------|---------------------------------|---------------------------------------|----------------------------------|-----------------|-----------------|------------|
| SB-AA02 | 1/2AA | TC, AX, 2P ST, 3P | 3.6 | 1200 | 0.5 | 10 | 20 | -55 ~ +85 | ø14.3 x H24.5 | 9 |
| SBA011 | AA | TC, AX, 2P ST, 3P | 3.6 | 2200 | 1 | 60 | 120 | -55 ~ +85 | ø14.3 x H49.3 | 16 |
| SBC01 | C | TC, ST, AX | 3.6 | 7200 | 5 | 100 | 250 | -55 ~ +85 | ø25.6 x H49.5 | 50 |
| SBD01 | D | TC, ST, AX | 3.6 | 14000 | 40 | 250 | 500 | -55 ~ +85 | ø33.5 x H59.2 | 95 |
| SWD02 | D | ST, TC | 3.6 | 13000 | 100 | 1800 | 3000 | -55 ~ +85 | ø34 x H61 | 100 |

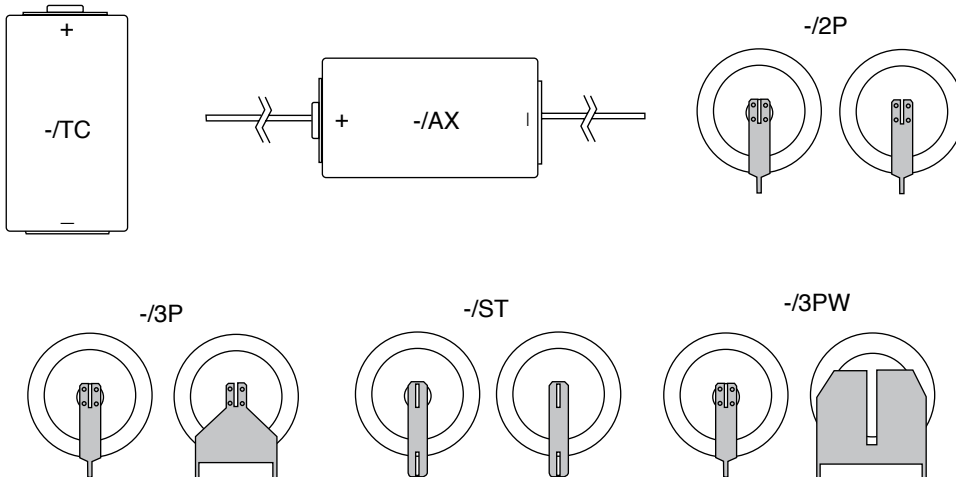

BATTERIES

ZINC CHLORIDE

- Mercury free
- General purpose applications
- Higher energy content than zinc carbon batteries
- Lower capacity alternatives to alkaline batteries
- Suitable for low and medium current drain batteries.



ORDERING INFORMATION

| Ordering Code | Voltage (V) | Can Size | Dimensions (mm) |
|---------------|-------------|----------|-----------------------|
| ER20MX | 1.5 | D | ø34.2 x H61.5 |
| ER14MX | 1.5 | C | ø26.2 x H50 |
| ER6MX | 1.5 | AA | ø14.5 x H50.5 |
| ER03X | 1.5 | AAA | ø10.5 x H44.5 |
| E6F22MX | 9 | PP3 | L26.5 x W17.5 x H48.5 |